



SRM-11.6H

11.6" Sunlight Readable LCD Monitor

- Produces Clear, Sharp Images Even in Direct, Bright Sunlight
- 1,000 nits Brightness
- LED Backlights
- **TRU-Tuff** Ensures Maximum Shock/Vibration Resistance
- Lockable OSD (On-Screen Display) Controls
- 3 Year Warranty
- Touch Screen Option Available

The SRM-11.6H Sunlight Readable LCD monitor is designed to operate in direct bright sunlight, or in other high ambient-light conditions. It utilizes state-of-the-art LED backlights to produce over 1,000 nits of brightness (vs. 250-300 nits for standard monitors). This results in amazingly bright, crystal-clear images, even with direct, bright sunlight on the face of the screen. The SRM-11.6H Sunlight Readable monitor will eliminate the need for sun-shields, squinting or straining to see washed-out images.

The SRM-11.6H Sunlight Readable LCD monitor is built with industrial-grade components, and receives our exclusive **TRU-Tuff** treatment. The **TRU-Tuff** process includes: RTV silicone on all connections and critical components; all wires are dressed, tie-wrapped and secured; and ThreadLock on all screws. This, plus the rugged powder-coated steel enclosure, ensures maximum shock and vibration resistance. This monitor is ideal for a wide range of demanding applications including industrial, military, law enforcement, aviation, marine, inspection, surveying, cranes, oceanic, entertainment and transportation. **TRU-Vu** monitors are backed by our full 3-Year Warranty.


Specifications

MODEL	SRM-11.6H
LCD Panel	11.6" LCD; LED Backlights
Resolution	1366 x 768 (Accepts Video Inputs up to 1920 x 1080 Resolution)
Viewable Area	10.08" (W) x 5.67" (H) (256.125 x 144 mm)
Pixel Pitch	0.1875
Display Colors	16.2M
Aspect Ratio	16:9
Brightness	1,000 nits
Contrast Ratio	500:1
Viewing Angle	120° (H) x 115° (V)
Response Time	12 msec Trf
Control	OSD (On-Screen Display) Via Rear Panel Pushbuttons
Video Inputs	VGA, HDMI
Power Requirement	12-24 VDC (2.5mm Barrel Plug)
Power Consumption	19W (1.6A @ 12VDC)
Enclosure	Powder-Coated Steel
Mounting	75 x 75 mm VESA
Operating Temperature	+32° to +140° F / 0° to +60° C
Humidity	0 - 80% RH
Shock	100G (6 ms, X-Y-Z)
Vibration	3G, 33-400 Hz 2 Hours (X,Z) 4 hours (Y)
Dimensions	11.30" (W) x 7.17" (H) x 1.57" (D) / 287 (W) x 182 (H) x 40 (D) mm
Weight	3.62 lbs. / 1.64 kg

SRM-11.6H

11.6" Sunlight Readable LCD Monitor

Dimensions:

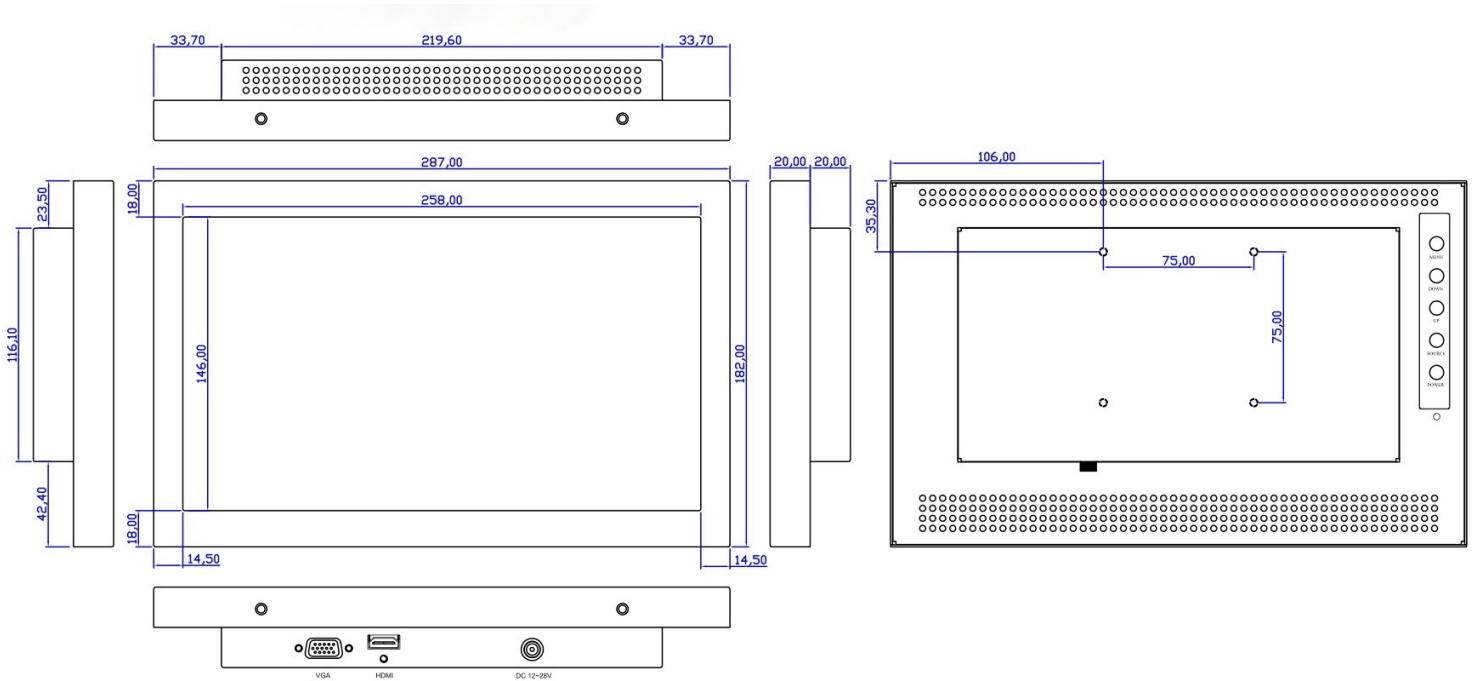

Standard Accessories:

- VGA Cable
- HDMI Cable
- DC Power Pigtail with locking connector

Available Options:

- NEMA 4 Waterproof Front Face (SRMW-11.6J-36)
- Optical Bonding With Anti-Reflective Glass
- Capacitive Touch Screen
- DVI Video Input
- 90-240 VAC Power Adapter (PS-200)
- Open-Frame Configuration
- Private Label
- Other Customer - Specific Modifications