

### SRMTRWP—17 Series

#### 17" Waterproof Sunlight Readable Panel-Mount Touch Screen Monitor



- 1,000 or 1,500 nits Brightness
- Produces Clear, Sharp Images Even in Direct, Bright Sunlight
- 5-Wire Resistive Touch
- Waterproof NEMA 4X Stainless Steel Panel-Mount Enclosure
- Video Inputs: VGA, DVI-D
- Operating Temperature: -22 °F to 185 °F (-30 ° to + 85 °C)
- Ambient Light Sensor
- Auto Re-Start After Power Loss
- **TRU-Tuff** Ensures Maximum Shock & Vibration Resistance
- 3 Year Warranty

The SRMTRWP-17 Series Sunlight Readable waterproof panel-mount touch screen monitors are designed to operate in direct bright sunlight, or in other high ambient-light conditions. They utilize state-of-the-art LED Backlights to produce 1,000 to 1,500 nits of brightness (vs. 250-300 nits for standard monitors). The 5-wire resistive touch screen can be activated by almost any object — gloved finger, stylus, pen, etc. They are ideal for use outdoors, in wash-down environments, or where liquids, steam or moisture may damage standard monitors. The SRMTRWP-17 Series are perfect for use in a wide range of industrial, marine, military, manufacturing, inspection, advertising and transportation applications where viewability in direct, bright sunlight is crucial.


All TRU-Vu industrial LCD monitors are specifically designed for use in demanding applications. Every TRU-Vu monitor utilizes industrial-grade components and high-end LCD panels not found in retail/consumer-grade monitors. This ensures superior image quality, improved performance and greater durability. Our 3-Year Warranty ensures you of reliable worry-free operation. Visit [www.TRU-VuMonitors.com](http://www.TRU-VuMonitors.com) for more details.

Specifications			
MODEL	SRMHTRWP-17H	SRMHTRWP-17C	SRMTRWP-17C
LCD Panel	17" Color TN Panel; LED Backlights		
Touch Technology	5-Wire Resistive Touch		
Touch Interface	USB		
Resolution	1280 x 1024 (SXGA)		
Viewable Area	13.30" (W) x 10.64" (H) (337.9 x 270.3 mm)		
Pixel Pitch	0.264mm		
Display Colors	16.7 Million		
Aspect Ratio	4:3 (5:4)		
Brightness	1,500 nits		1,000 nits
Contrast Ratio	1,000:1		
Dimming Function	Automatic Ambient Light Sensor		
Viewing Angle	160° (H) x 140° (V)		
Response Time	30 msec Trf		
Video Inputs	VGA, HDMI		VGA, DVI-D
Power Requirement	12-24VDC		
Power Consumption	TBD		
Enclosure	Panel-Mount, Stainless Steel; NEMA 4X Waterproof		
Operating	-22° to +185 °F (-30° to +85 °C)		
Humidity	5-90% RH		
Shock	50 G (20 msec, ½ sine)		
Vibration	1.5G RMS 10-200 HZ		
Dimensions	16.88" (W) x 14.12" (H) x 2.21" (D) (428.94 x 358.9 x 56.18 mm)		
Weight	13.5 lbs. (6.13 kg)		
Warranty	3 Years		

## SRMTRWP-17 Series

17" Waterproof Sunlight Readable Panel-Mount  
Touch Screen Monitor

Dimensions: (mm)

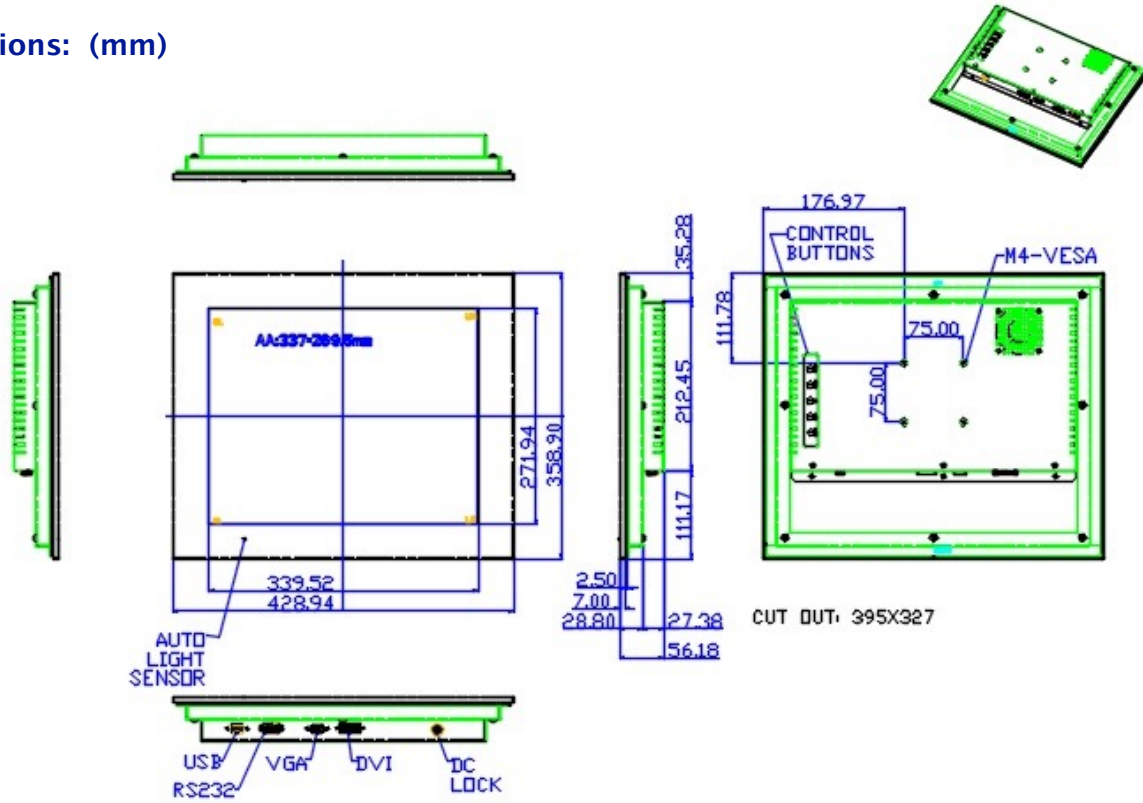

### Standard Accessories:

- VGA Cable
- Power Pigtail Wire
- DVI Cable

### Available Options:

- HD-SDI Input
- Private Label
- HDMI Input