



SRMT-19 Series

19" Sunlight Readable Touch Screen LCD Monitor

- Produces Clear, Sharp Images Even in Direct, Bright Sunlight
- 1,000 nits Brightness
- 5-Wire Resistive or Surface Capacitive Touch
- Auto Re-Start After Power Loss
- Lockable OSD (On-Screen Display) Controls
- 3 Year Warranty


The SRMT-19 Series Sunlight Readable Touch Screen monitors are designed to operate in direct bright sunlight, or in other high ambient-light conditions. They utilize state-of-the-art LED backlights to produce over 1,000 nits of brightness (vs. 250-300 nits for standard monitors). This results in amazingly bright, crystal-clear images, even with direct, bright sunlight on the face of the screen. SRMT-19 Series Sunlight Readable Touch Screen monitors will eliminate the need for sun-shields, squinting or straining to see washed-out images. The capacitive touch screen can only be activated via a naked human finger, greatly reducing the possibility of false-triggering. The resistive touch screen can be activated via nearly any type of object.

All TRU-Vu industrial LCD monitors are specifically designed for use in demanding applications. Every TRU-Vu monitor utilizes industrial-grade components and high-end LCD panels not found in retail/consumer-grade monitors. This ensures superior image quality, improved performance and greater durability. Our 3-Year Warranty ensures you of reliable worry-free operation. Visit www.TRU-VuMonitors.com for more details.

	Specifications			
MODEL	SRMTC-19V	SRMTC-19C	SRMTR-19C	SRMTC-19C-H
LCD Panel	19" Color LCD; LED Backlights			
Touch Screen Type	Surface Capacitive		5-Wire Resistive	Surface Capacitive
Touch Interface	USB			
Resolution	1280 x 1024 (SXGA)			
Viewable Area	14.81" (W) x 11.85" (H) (376.17 mm x 300.98 mm)			
Pixel Pitch	0.294mm x 0.294mm			
Display Colors	16.7 Million			
Aspect Ratio	4:3 (5:4)			
Brightness	1,000 nits			
Ambient Light Sensor	Optional			Standard
Contrast Ratio	1,000:1			
Viewing Angle	170° (H) x 160° (V)			
Response Time	5 msec (Trf)			
Control	OSD (On-Screen Display) via Front Panel Pushbuttons			
Video Inputs	VGA	VGA & DVI		
Audio	Dual Rear Speakers			
Power Requirement	12 VDC (90-240 VAC with Included Power Brick)			
Power Consumption	48 Watts			
Enclosure	ABS			
Mounting	Included Base or 75x75mm VESA Hole Pattern			
Operating Temperature	32° to 122° F (0° to 50° C)			-22° to 185° F (-30° to +85° C)
Humidity	5-90% RH			
Shock	50 G (20 msec, ½ sine)			
Vibration	1.5G RMS 10-200 HZ			
Dimensions	16.5" (W) x 13.75" (H) x 1.95" (D) (419.09 (W) x 349.25 (H) x 49.52 (D) mm)			
Weight	11 lbs. / 5 kg			
Included Accessories	90-240 VAC Adapter, VGA Cable, Tabletop Base			
Warranty	3 Years			

SRMT-19 Series 19" Sunlight Readable Touch Screen LCD Monitor

Dimensions:

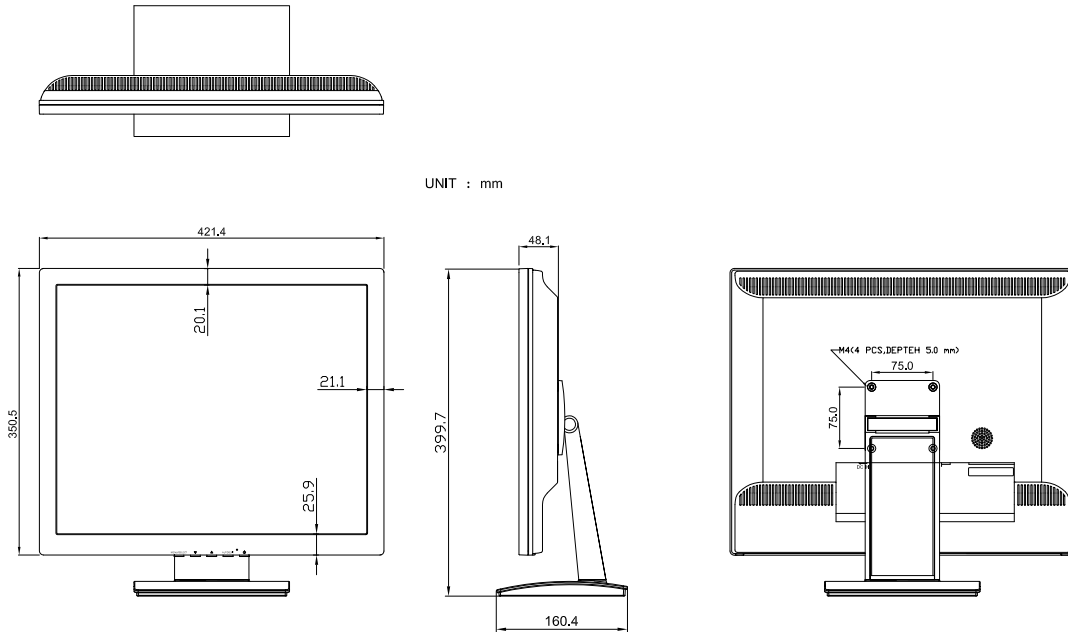

Standard Accessories:

- 90-240 VAC Power Brick
- VGA Cable
- Tabletop Base

Available Options:

- Protective Anti-Glare Glass
- Vandal-Resistant Glass
- Waterproof Enclosure
- Panel Mount Enclosure
- Open-Frame Configuration
- Wall Mount Brackets
- Private-Label
- Other Customer - Specific Modifications