

### VM-32D

#### Customizable Industrial HD LCD Monitor



- 32" HD Color LCD Monitor
- Full HD Resolution 1920 x 1080 (1180p/60)
- Wide Viewing Angle (178°)
- Aspect Correction: Does Not Distort 4:3 Image on 16:9 Screen
- Video Inputs: VGA, HDMI, Composite (BNC Loop-Thru), NTSC/PAL
- Picture-In-Picture
- 12 VDC Output
- Rugged Steel Housing
- Can Be Customized to Meet Your Needs
- 3 Year Warranty

The VM-32D HD monitor is ideal for industrial, commercial, A/V, broadcast, and medical applications. It provides crystal-clear HD images, picture-in-picture, and more. It is available in a standard enclosure or open frame, panel mount or touch screen configurations. An extensive list of available OEM options enables you to customize the VM-32D to your specific needs. Visit [www.TRU-VuMonitors.com](http://www.TRU-VuMonitors.com) for more details.


All TRU-Vu industrial LCD monitors are specifically designed for use in demanding industrial, commercial, medical, and A/V applications. Every TRU-Vu monitor utilizes industrial-grade components and high-end LCD panels not found in retail/consumer-grade monitors. This ensures superior image quality, improved performance and greater durability.

#### Specifications

LCD Panel	32" TFT Color LCD
Display Resolution	1920 x 1080 (Full HD) 1080p/60
Viewing Area	27.48" (W) x 15.43" (H)
Pixel Pitch	0.364mm x 0.364mm
Display Colors	16.7 Million
Aspect Ratio	16:9
Brightness	500 nit
Contrast Ratio	4,000:1
Viewing Angle	178° (H) x 178° (V)
Response Time	6.5 msec (gray to gray)
Control	OSD (On-Screen Display) via Rear Panel Pushbuttons or Remote Control
Video Input	15 pin D-SUB Connector
HDMI Input	1 HDMI Connector
Analog Video In/Out	3 BNC Inputs / 1 BNC Output
In / Output Impedance	75Ω / Auto Terminating Output
Power Requirement	24 VDC / 90-240 VAC
Power Consumption	100 Watts
Enclosure	Black Powder-Coated Steel
Mounting	Mounting Stand (shown) Included; VESA Mounting 100 x 100mm, 100 x 200mm, 200 x 200mm
Operating Temperature	32° to 104° F / 0° to 40° C
Humidity	10-90% RH
Shock	50 G (11 msec, 1/2 sine)
Vibration	1.5 G RMS 10-300Hz
Approvals	UL/cUL, FCC, CE, RoHS
Dimensions	30" (W) x 18.5" (H) x 3.3" (D) / 762 (W) X 469.9 (H) X 83.82 (D) mm
Weight	32 lbs. / 14.5 kg

## VM-32D 32" Customizable HD LCD Monitor

### Dimensions:

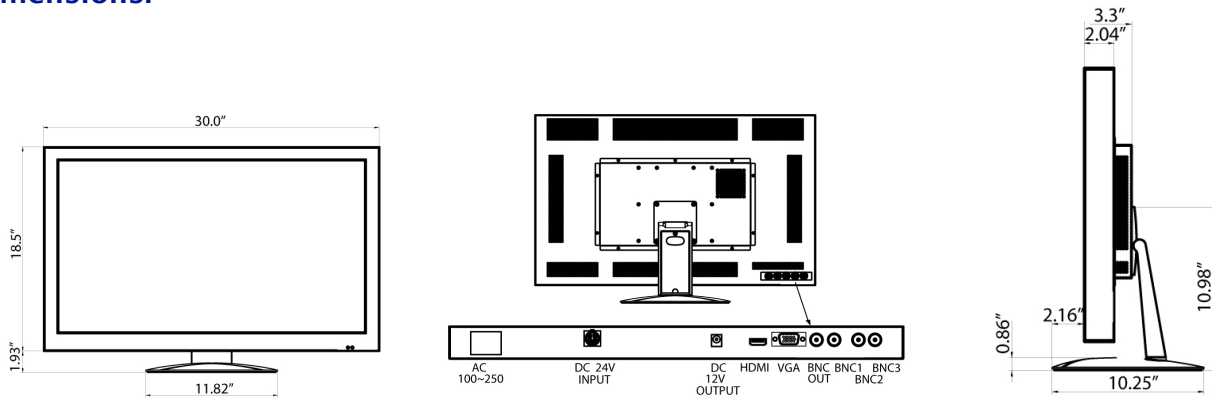

### Standard Accessories:

- AC Power Cord
- Tabletop Stand
- VGA Cable
- Remote Control

### Available Options:

- Internal Speakers
- Protective/Anti-Reflective Glass Screen
- Panel Mount
- Touch Screen
- Open-Frame Configuration
- Private Label
- Other Customer - Specific Modifications