



### VM-26D

#### Customizable Industrial Monitor

- 26" TFT Active Matrix Color LCD
- High Resolution (1366 x 768)
- 2500:1 Contrast Ratio
- Wide Viewing Angle (178°)
- Video Inputs: VGA, HDMI, Composite (BNC Loop-thru), NTSC/PAL
- Picture-In-Picture
- 12VDC Output for Camera
- Can Be Customized to Meet Your Needs
- Rugged Metal Enclosure
- 3 Year Warranty


**TRU-VU** industrial LCD monitors are specifically designed for use in demanding industrial, commercial, medical and A/V applications. Every **TRU-VU** monitor utilizes industrial-grade components and high-end LCD panels not found in retail/consumer-grade monitors. This ensures superior image quality, improved performance and greater durability.

The VM-26D monitors offer a variety of video inputs, and are available in standard, open frame, rack mount, panel mount and touch screen configurations. An extensive list of available OEM options enables you to customize a solution to your specific needs. Visit [www.TRU-VUMonitors.com](http://www.TRU-VUMonitors.com) for more details.

### Specifications

<b>LCD Panel</b>	26" TFT Color LCD
<b>Resolution</b>	1366 x 768 (WXGA)
<b>Viewing Area</b>	22.71" (W) x 12.74" (H)
<b>Pixel Pitch</b>	0.4215mm x 0.4215mm
<b>Display Colors</b>	16.7 Million
<b>Aspect Ratio</b>	16:9
<b>Brightness</b>	500 nit
<b>Contrast Ratio</b>	2500:1
<b>Viewing Angle</b>	178° (H) x 178° (V)
<b>Response Time</b>	6.5 msec (gray to gray)
<b>Control</b>	OSD (On-Screen Display) via Rear Panel Pushbuttons or Remote Control
<b>VGA Input</b>	15 pin D-SUB Connector
<b>HDMI</b>	1 HDMI Connector
<b>Analog Video In/Out</b>	3 BNC Inputs / 1 BNC Output
<b>In / Output Impedance</b>	75Ω / Auto Terminating Output
<b>Power Requirement</b>	24 VDC / 90-240VAC
<b>Power Consumption</b>	110 Watts
<b>Enclosure</b>	Black Powder-Coated Steel
<b>Mounting</b>	Mounting Stand (shown) Included; VESA Mounting 100x100mm, 100x200mm, 200x200mm
<b>Operating Temperature</b>	14° F to 122° F
<b>Humidity</b>	10-90% RH
<b>Shock</b>	50 G (11 msec, ½ sine)
<b>Vibration</b>	1.5 G RMS 10-300Hz
<b>Approvals</b>	UL/cUL, FCC, CE, RoHS
<b>Dimensions</b>	25.0" (W) x 15.0" (H) x 3.2" (D)
<b>Weight</b>	25 lbs.

## Dimensions:

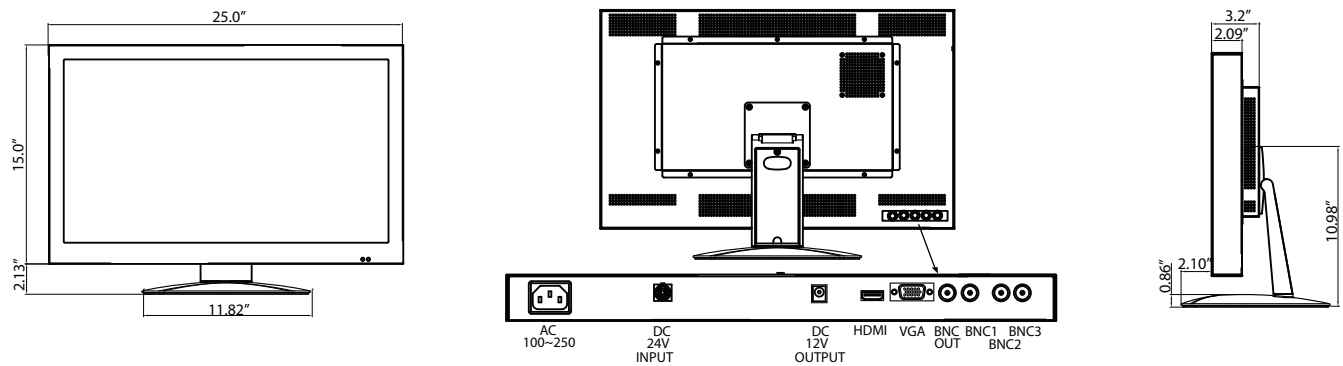

## Standard Accessories:

- Mounting Stand
- VGA Cable
- Remote Control

## Available OEM Options:

- Protective/Anti-Reflective Glass Screen
- Touch Screen
- Open-Frame Configuration
- Private Label
- Other Customer - Specific Modifications