



### VML-15L Series

#### Customizable Industrial Monitors

- 15" TFT Active Matrix Color LCD
- High Resolution: 1024 x 768 (XGA)
- Video Inputs: VGA, S-Video, DVI-D, Composite, BNC Loop-Thru
- NTSC/PAL Auto-Recognition
- Lockable On-Screen Display Controls
- Auto Re-Start After Power Loss
- Can Be Customized to Meet Your Needs
- 3 Year Warranty


The VML-15L Series monitors offer a variety of video inputs, and are available in standard, open frame, rack mount, and touch screen configurations. An extensive list of available OEM options enables you to customize a solution to your specific needs. The VML-15SL-CTZ incorporates a high-end image processing board to eliminate typical analog video pixel jitter.

TRU-Vu industrial LCD monitors are specifically designed for use in demanding industrial, commercial, medical and A/V applications. Every TRU-Vu monitor utilizes industrial-grade components and high-end LCD panels not found in retail/consumer-grade monitors. This ensures superior image quality, improved performance and greater durability. Visit [www.TRU-VuMonitors.com](http://www.TRU-VuMonitors.com) for more details.

Specifications			
MODEL	VML-15SL-CTZ	VML-15BL	VML-15CL
LCD Panel	15" Color LCD; LED Backlights		
Resolution	1024 x 768 (XGA)		
Viewable Area	11.97" (W) x 8.98" (H) (304.12 x 228.09 mm)		
Pixel Pitch	0.297mm		
Display Colors	16.2 M		
Aspect Ratio	4:3		
Brightness	250 nits		
Contrast Ratio	700:1		
Viewing Angle	170° (H) x 160° (V)		
Response Time	8 msec (gray to gray)		
Control	OSD (On-Screen Display) via Front Panel Pushbuttons		
Video Input	VGA, S-Video, Composite (BNC) NTSC/PAL Auto-Recognition	VGA, Composite (BNC Loop-Thru) NTSC/PAL Auto-Recognition	VGA-DVI-D
Analog Video In / Out	1 BNC Input	1 BNC Input/1 BNC Output	----
In / Output Impedance	75Ω / Auto Terminating Output		
Audio	Standard	Optional	Optional
Power Requirement	12 VDC (90-240 VAC with Included Power Brick)		
Power Consumption	25 Watts		
Enclosure	ABS		
Mounting	Included Base or 75x75mm Rear VESA Mounting Holes		
Operating Temperature	+32° to +140° F (0° to +60° C)		
Humidity	8-90% RH		
Shock	50 G (20 msec, 1/2 sine)		
Vibration	1.5G RMS 10-200 HZ		
Approvals	UL/cUL, FCC, CE, TUV, RoHS		
Dimensions	13.66" (W) x 10.87" (H) x 1.78" (D) (347 x 276 x 45.2 mm)		
Weight	5.16 lbs. (2.34 kg)		

## VML-15L Series 15" Customizable Industrial LCD Monitors

### Dimensions:

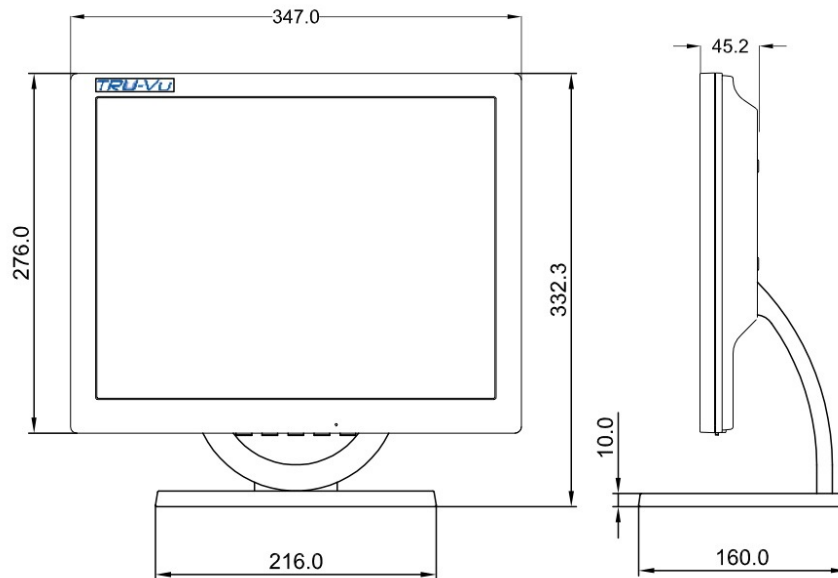

### Standard Accessories:

- 90-240 VAC Power Brick
- Tabletop Stand
- VGA Cable

### Available Options:

- Protective/Anti-Reflective Glass Screen
- 450 Nits Brightness
- Steel Enclosure
- Panel Mount
- Touch Screen
- Rack Mount
- Open-Frame Configuration
- Private Label
- Other Customer - Specific Modifications