



VMT-15 Series

15" Touch Screen LCD Monitors

- 5-Wire Resistive Touch Screen
- High Resolution: 1024 x 768 (XGA)
- LED Backlights
- 250 or 350 Nits Brightness
- Auto Re-Start After Power Loss
- Can Be Customized to Meet Your Needs
- 3 Year Warranty

The VMT-15 Series touch screen monitors are available with 5-Wire Resistive, Surface Capacitive or S.A.W. touch screen. The image quality is exceptionally clear and bright; the contact activation point is extremely accurate, and features a USB touch interface. An extensive list of OEM options enables you to customize the VMT-15 Series touch screens to meet your exact needs. These are available with 250 nits or 350 nits brightness.


TRU-Vu industrial LCD monitors are specifically designed for use in demanding industrial, commercial, medical and A/V applications. Every TRU-Vu monitor utilized industrial-grade components and high-end LCD panels not found in retail/consumer-grade monitors. This ensures superior image quality, improved performance and greater durability. Visit www.TRU-VuMonitors.com for more details.

	Specifications		
MODEL	VMTR-15C-24	VMTR-15C	VMLTR-15CL
LCD Panel	15" Color LCD; LED Backlights		
Touch Screen Type	5-Wire Resistive Touch		
Touch Interface	USB & RS-232	USB	
Resolution	1024 x 768 (XGA)		
Viewing Area	11.97" (W) x 8.98" (H) (304.128 x 228.096 mm)		
Pixel Pitch	0.297mm		
Display Colors	16.2 M		
Aspect Ratio	4:3		
Brightness	350 nits	250 nits	
Contrast Ratio	700:1		
Viewing Angle	170° (H) x 160° (V)		
Response Time	8 msec (Trf)		
Control	OSD (On-Screen Display) via Front Panel Pushbuttons		
Video Input	VGA, DVI		
Audio	Rear Speakers		
Power Requirement	12-24 VDC	12 VDC (2.1 mm Barrel Plug); 90-240 VAC via Included Power Brick	
Power Consumption	25 Watts		
Enclosure	ABS		
Mounting	Included Base or 75x75mm Rear VESA Mount Holes	75x75mm Rear VESA Holes	Included Base or 75x75mm Rear VESA Mount Holes
Operating Temperature	+32° to 149° F (0° to +65° C)		
Humidity	8-90% RH		
Shock	50 G (20 msec, ½ sine)		
Vibration	1.5G RMS 10-200 HZ		
Approvals	RoHS	UL/cUL,FCC,RoHS	
Dimensions	13.66" (W) X 10.87" (H) x 1.78" (D) (347 x 276 x 45.20 mm)		
Weight	5.64 lb / 2.56 kg		
Warranty	3 Years		

VMT-15 Series

15" Touch Screen LCD Monitors

Dimensions:

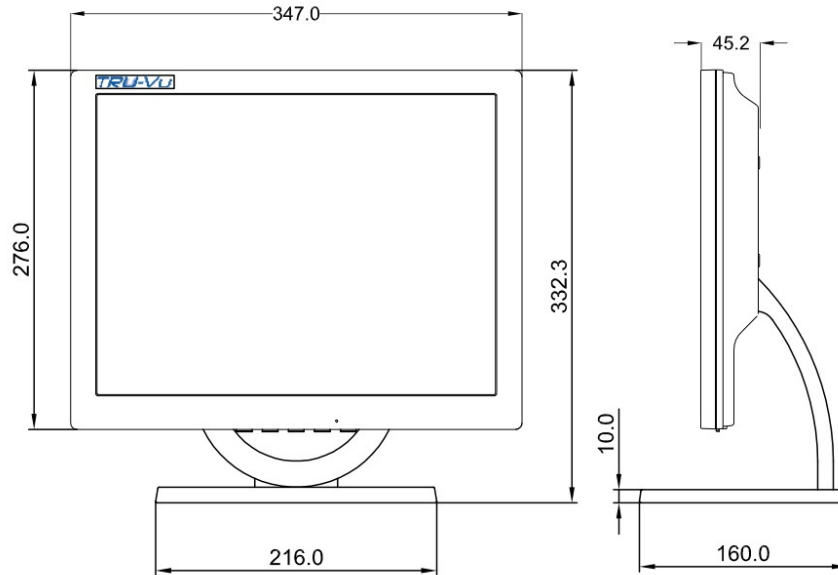

Standard Accessories:

- 90-240 VAC Power Brick (VMTR-15C & VMLTR-15CL only)
- VGA Cable
- Tabletop Base (VMLTR-15CL Only)
- Audio Cable
- DVI Cable
- USB Cable

Available Options:

- PS-12-LC AC Power Brick for VMTR-15C-24
- HDMI & DisplayPort Inputs
- NEMA 4X Waterproof Stainless Steel Enclosure
- Powder-Coated Steel Enclosure
- Surface Capacitive Touch Screen
- S.A.W. Touch Screen
- Panel-Mount
- Open-Frame Configuration
- Private Label
- Wall Mount Bracket