

SRMW-24 Series

24" Waterproof Sunlight Readable HD LCD Monitor



- True Sunlight-Readable HD Monitor
- 1,000 Nits Brightness
- Waterproof NEMA 4X Stainless Steel Enclosure
- Full HD Resolution: 1920 x 1080 (1080p/60)
- LED Backlights
- Auto Re-Start After Power Loss
- Protective Anti-Reflective Glass
- Can Be Customized To Meet Your Needs
- 3-Year Warranty

The SRMW-24 Series Sunlight Readable HD LCD monitors are designed to operate in direct bright sunlight, or in other high ambient-light conditions. These state-of-the-art monitors produce 1,000 nits of brightness (vs. 150-200 nits for standard laptops). This results in amazingly bright, crystal-clear HD images, even with direct, bright sunlight on the face of the screen. The NEMA 4X fully waterproof enclosure ensures that the monitor will withstand rain, snow, seawater, etc. The SRMW-24 Series Sunlight Readable monitors are ideal for use in a wide range of industrial, law enforcement, aviation, marine, military, inspection, advertising, sports/entertainment and transportation applications where view-ability in direct bright sunlight is crucial.


All TRU-Vu industrial LCD monitors are specifically designed for use in demanding applications. Every TRU-Vu monitor utilizes industrial-grade components and high-end LCD panels not found in retail/consumer-grade monitors. This ensures superior image quality, improved performance and greater durability. Our 3-Year Warranty ensures you of reliable worry-free operation. Visit TRU-VuMonitors.com for more details.

Specifications			
MODEL	SRMW-24Z-SS	SRMW-24R-SS	SRMW-24R-P
LCD Panel	24" Color; LED Backlights		
Display Resolution	1920 x 1080		
Viewable Area	20.92" x 11.76" (531.4 x 298.9 mm)		
Pixel Pitch	0.277mm		
Display Colors	16:7 M		
Aspect Ratio	16:9		
Brightness	1,000 nits		
Mode	Landscape		Portrait
Ambient Light Sensor	Standard	Optional	
Contrast Ratio	5,000:1		
Viewing Angle	178° (H) x 178° (V)		
Response Time	25 msec		
Control	OSD (On-Screen Display) via Rear Pushbuttons		
Video Inputs	VGA, HDMI, HD-SDI (Loop-Thru), BNC (loop-Thru)	VGA, HDMI, Display Port	
Power Requirement	24 VDC or 90-240 VAC	90-240 VAC	24 VDC or 90-240 VAC
Power Consumption	45W		
Enclosure	Stainless Steel, NEMA 4X		
Mounting	100 x 100mm Rear VESA Mount Holes		
Operating	-4° to 158° F (-20° to +70° C)		
Humidity	5-90% RH		
Shock	50G Half-sine		
Vibration	1.5G RMS 10-200Hz		
Approvals	UL, FCC, CE, RoHS	RoHS	
Dimensions	24.01" (W) x 14.31" (H) x 3.11" (D) (610 x 363.6 x 79mm)		
Weight	23.44 lbs. (10.63 kg)		
Warranty	3-Years		

SRMW-24-Series

24" Waterproof Sunlight Readable HD LCD Monitor

Dimensions: (mm)

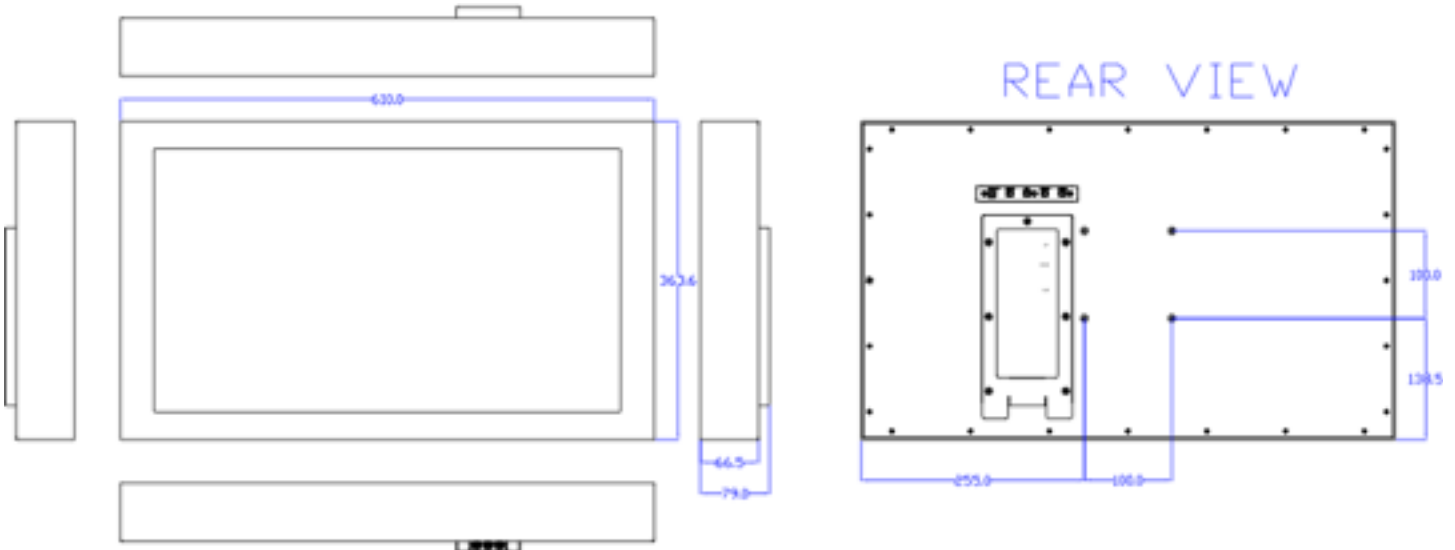

Standard Accessories:

- VGA Cable
- HDMI Cable

Available Options:

- Automated Ambient Light Sensor (for SRMW-24R-SS)
- 12-24 VDC Operation
- DVI Video Input
- DisplayPort Video Input
- Private Label
- Wall Mount Bracket
- Other Customer - Specific Modifications