

ZBMT-24 Series

24" HD Multi-Touch Touch Screen LCD Monitor



- Projected Capacitive Touch Technology; 10 Touch Points
- Can Be Activated Via Exposed Finger, and Surgical or Thin Cotton Gloves
- Zero-Bezel, Seamless, All-Glass Front Face
- Sleek Design, Easy to Clean
- Full HD Resolution: 1920 x 1080 (1080p/60)
- Dual Built-in Speakers (Rear)
- Auto Re-Start After Power Loss
- Can Be Customized To Meet Your Needs
- 3 Year Warranty

The ZBMT-24 Series projected capacitive, multi-touch, Zero-Bezel touch screen monitors offer the latest in LCD touch screen technology. The projected capacitive touch technology can be activated via an exposed finger (like standard capacitive touch), and also a finger inside a surgical glove or thin cotton glove. The multi-touch capability allows 10 simultaneous touch points. It is also unaffected by dirt, grease or moisture on the glass surface. The sleek all-glass, seamless, zero-bezel front face is stylish as well as functional; it is easy to clean and eliminates the potential for contamination build-up under the bezel. The thin black housing finishes off the elegant look, and is perfect for healthcare, kiosk, hospitality and other applications. Compatible with all Windows and most Linux operating systems.


All TRU-Vu industrial LCD monitors are specifically designed for use in demanding applications. Every TRU-Vu monitor utilizes industrial-grade components and high-end LCD panels not found in retail/consumer-grade monitors. This ensures superior image quality, improved performance and greater durability. Our 3-Year Warranty ensures you of

		Specifications	
MODEL	ZBMT-24R	ZBMT-24G	
LCD Panel	24" Color LCD; LED Backlights		
Touch Screen Type	Projected Capacitive Touch		
Touch Interface	USB		
Display Resolution	1920 x 1080		
Viewable Area	20.92" x 11.76" (531.4 x 298.9 mm)		
Pixel Pitch	0.277mm		
Display Colors	16:7 M		
Aspect Ratio	16:9		
Brightness	250 nits		
Contrast Ratio	3,000:1		
Viewing Angle	178° (H) x 178° (V)		
Response Time	12 ms Trf		
Control	OSD (On-Screen Display) via Front Buttons		
Video Inputs	VGA, HDMI, DisplayPort	HDMI, DisplayPort, DVI	
Audio	Dual Rear Speakers		
Power Requirement	12 VDC (2.1mm Barrel Plug) 100-240 VAC via Included Power Brick		
Power Consumption	75 W max (63 W typical)		
Enclosure	ABS, Zero-Bezel Front Face		
Mounting	100 x 100 mm / 200 x 100 mm Rear VESA Holes		
Operating Temperature	32° to 122° F (0 to 50° C)		
Humidity	5 - 90% RH		
Shock	50G Half-sine		
Vibration	1.5G rms 10-200Hz		
Dimensions	22.68" (W) x 13.56" (H) x 2.49" (D) (576.14 x 344.34 x 62.10 mm)		
Weight	13.2 lbs. (5.98 kg)		
Certifications	UL, CE, FCC, RoHS		
Warranty	3 Years		

ZBMT-24R Series

24" HD Multi-Touch Touch Screen LCD Monitor

Dimensions: (mm)

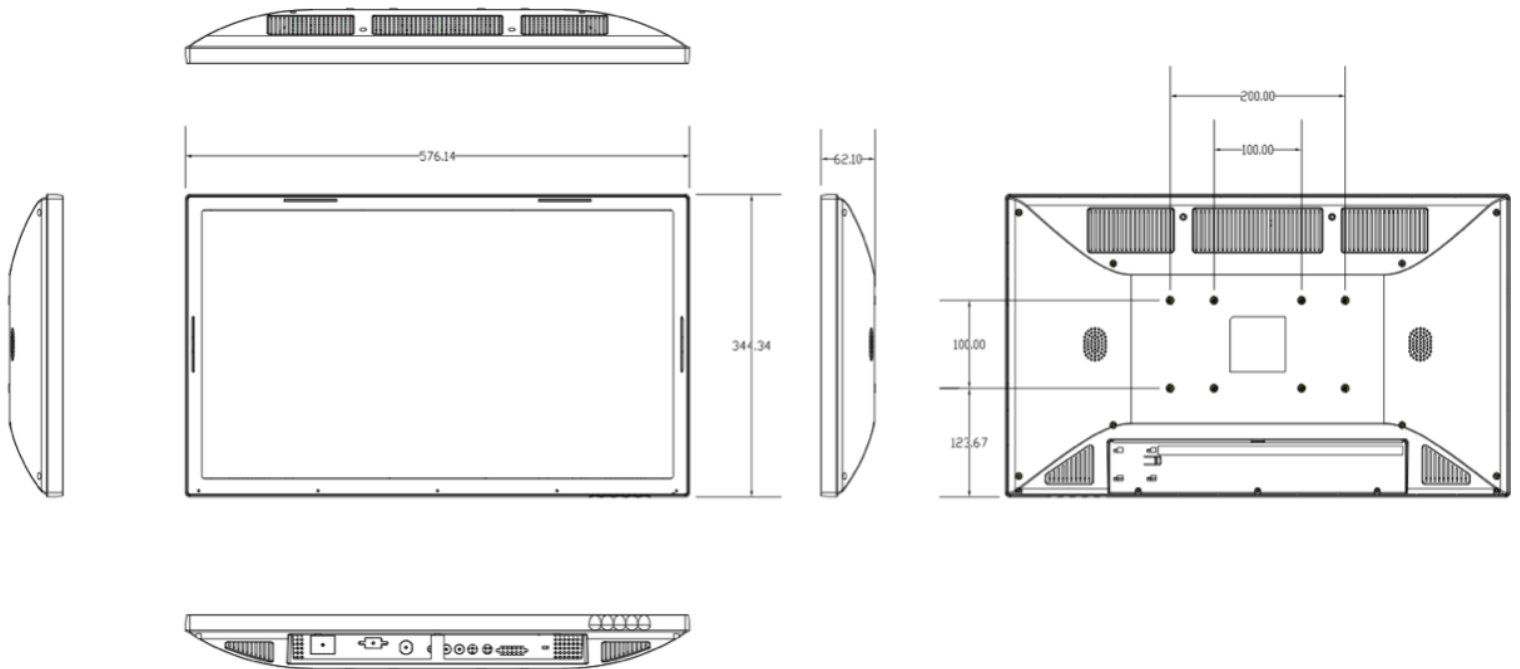

Standard Accessories:

- 90-260 VAC Power Brick
- VGA Cable
- HDMI Cable ("R" version only)
- USB Cable
- Audio Cable

Available Options:

- Tabletop Base
- Protective/Anti-Reflective Glass
- Private Label
- Other Customer - Specific Modifications