



### SRM-27 Series

#### 27" Sunlight Readable HD LCD Monitor

- True Sunlight Readable HD Monitor
- 1,000 Nits Brightness
- Full HD Resolution: 1920 x 1080 (1080p/60)
- Auto Re-Start After Power Loss
- Dual Speakers
- Video Inputs: VGA, HDMI, DisplayPort
- Lockable On-Screen Display (OSD) Controls
- Can Be Customized To Meet Your Needs
- 3 Year Warranty

The SRM-27 Series Sunlight Readable HD LCD monitors are designed to operate in direct bright sunlight, or in other high ambient-light conditions. These state-of-the-art monitors produce over 1,000 nits of brightness (vs. 150-200 nits for standard laptops). This results in amazingly bright, crystal-clear HD images, even with direct, bright sunlight on the face of the screen. The SRM-27 Series Sunlight Readable monitors are ideal for use in a wide range of industrial, law enforcement, aviation, marine, military, inspection, advertising and transportation applications where viewability in direct bright sunlight is crucial.


All TRU-Vu industrial LCD monitors are specifically designed for use in demanding applications. Every TRU-Vu monitor utilizes industrial-grade components and high-end LCD panels not found in retail/consumer-grade monitors. This ensures superior image quality, improved performance and greater durability. Our 3-Year Warranty ensures you of reliable worry-free operation. Visit [www.TRU-VuMonitors.com](http://www.TRU-VuMonitors.com) for more details.

Specifications				
MODEL	SRM-27R-12	SRM-27R	SRM-27R-MV	SRM-27E
LCD Panel	27" Color TN Panel; LED Backlights		27" Color MVA Panel; LED Backlights	
Display Resolution	1920 x 1080			
Viewable Area	23.53" (W) x 13.23" (H) (597.6 x 336.15 mm)			
Pixel Pitch	0.311mm			
Display Colors	16:7 M			
Aspect Ratio	16:9			
Brightness	1,000 nits			
Contrast Ratio	1,000:1			3,000:1
Viewing Angle	170° (H) x 160° (W)		178° (H) x 178° (V)	
Response Time	5 ms			12 ms
Control	OSD (On-Screen Display) via Front Pushbuttons			
Picture-In-Picture	N/A			Standard
Video Inputs	VGA, HDMI, DisplayPort			HDMI x 2, DisplayPort x 2
Audio	Dual Rear Speakers			Optional
Power Requirement	12 VDC	12 VDC (2.5 mm Barrel Plug); 90-240 VAC via Included Power Brick		90-240 VAC
Power Consumption	45 W			
Enclosure	ABS			Powder-Coated Steel
Mounting	Base Optional	Via Included Base or 100 x 100 mm / 200 x 200 Rear VESA Mount Holes		Base Optional
Operating Temperature	+32° to +122° F (0° to +50° C)			
Humidity	5-90% RH			
Shock	50G Half-sine 20 msec			
Vibration	1.5G RMS 10-200 Hz			
Dimensions	25.38" (W) x 15.25" (H) x 2.63" (D) (644.65 x 387.35 x 66.80 mm)			
Weight	12.08 lbs. (5.48 kg)			
Warranty	3 Years			

## SRM-27 Series

### 27" Sunlight Readable HD LCD Monitor

#### Dimensions:

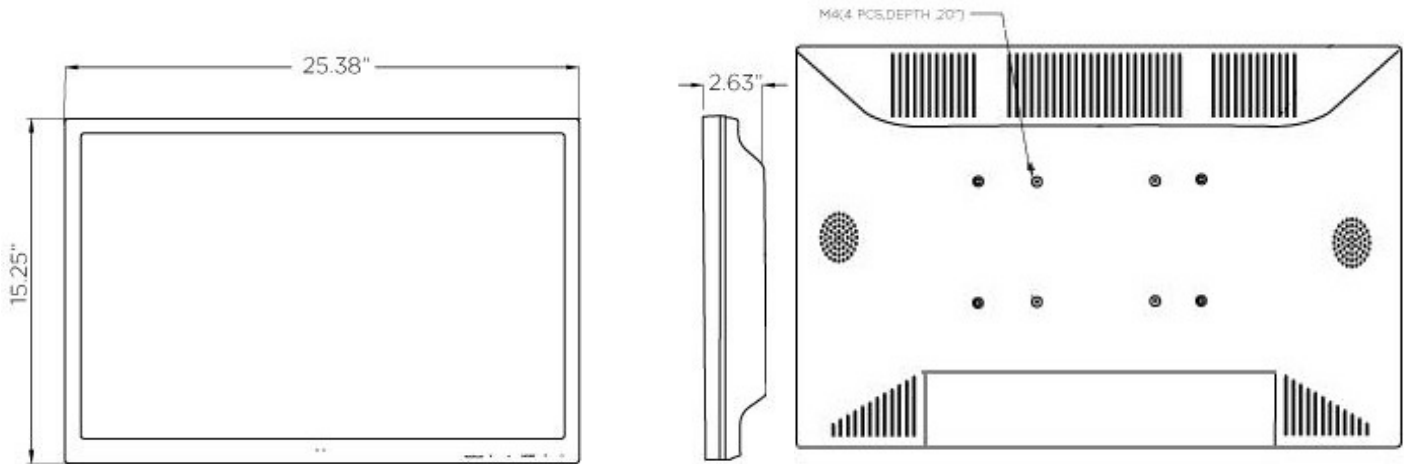

#### Standard Accessories:

- 90-240 VAC Power Brick
- VGA Cable
- HDMI Cable
- Audio Cable
- Tabletop Base

#### Available Options:

- DVI Video Input (SRM-27C)
- Steel Enclosure
- 1,500 Nits Brightness
- 24VDC Operation
- Ambient Light Sensor
- Dim-to-Black Hotkeys
- Protective Anti-Reflective Glass
- Wall Mount Brackets
- Remote Control
- Private Label
- Open-Frame Configuration